

HIGH POWER SINGLE ISOLATORS

41-FF-PP

Comprod Inc. Isolators are among the best in the industry for blocking the transfer of RF power flow in the opposite direction. High power and total reliability are two of the characteristics of these isolators. Used for inter-modulation panels, protecting your transmitters from reflected power, and providing extra isolation are just a few of the possible applications. These isolators can be combined with a variety of loads, 5/25/60/100/150/250 watt combinations, and combined with second harmonic filters for Hybrid Combiners (HTCs).

- **High Isolation**


- Minimizes intermodulation products

- **Low loss**

- Maximizes system performance

- **Continuous Power**

- Physical size and materials used maximize the performance across the operating band

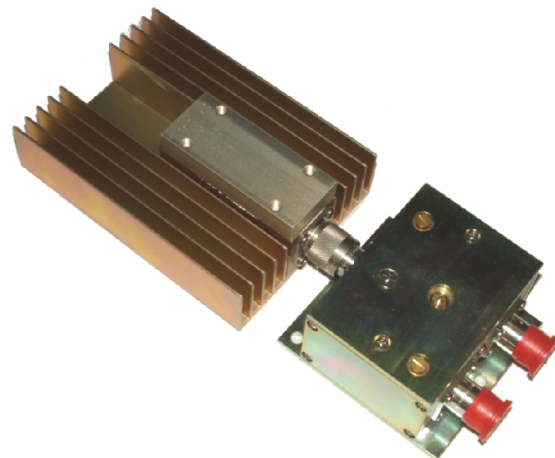

Electrical Specifications	41-13-XX	41-40-XX	41-80-XX
Frequency Range, MHz	138-174	406-512	746-960
Frequency Split, MHz	30	24	24
Bandwidth	2.5% Cent. Freq.	1% Cent. Freq.	2.5% Cent. Freq.
Continuous Power Input, Watts	150	250	150
Connectors	N Female	N Female	N Female
Output Load Size	5/25/60/100/150	5/25/60/100/150	5/25/60/100/150
Reverse Isolation, dB	30	30	30
Typical Insertion Loss, dB	0.45	0.45	0.25
VSWR	1.22:1	1.22:1	1.22:1
Temperature °C	-40 to +60	-40 to +60	-40 to +60

Mechanical Specifications	41-13-XX	41-40-XX	41-80-XX
Dimensions, in (H x W x D)	3.94 x 3.75 x 1.78	4.19 x 3.99 x 1.78	5.63 x 3.15 x 1.84
Weight, lbs	1,40	1,41	1,32
Mounting	Cavity / Plate / Cabinet / Rack Mount Are All Available		

Order Information	5 Watt Load	25 Watt Load	60 Watt Load	100 Watt Load	150 Watt Load
41-13-XX	41-13-05	41-13-25	41-13-60	41-13-100	41-13-150
41-40-XX	41-40-05	41-40-25	41-40-60	41-40-100	41-40-150
41-80-XX	41-80-05	41-80-25	41-80-60	41-80-100	41-80-150

XX = load size