


41-FF-PP

Our Isolators are among the best in the industry for blocking the transfer of RF power flow in the opposite direction. High power and total reliability are two of the characteristics of these isolators. Used for intermodulation panels, protecting your transmitters from reflected power, and providing extra isolation are just a few of the possible applications. These isolators can be combined with a variety of loads, 5/25/60/100/150/250-watt combinations, and combined with second harmonic filters for Hybrid Combiners (HTCs).

- High Isolation
 - Minimizes intermodulation products
- Low loss
 - Maximizes system performance
- Continuous Power
 - Physical size and materials used maximize the performance across the operating band

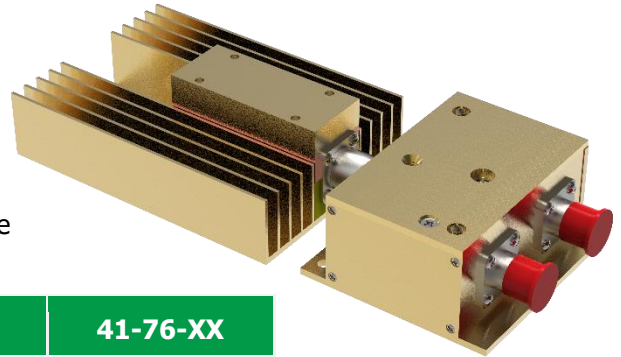

Electrical Specifications	41-13-XX	41-40-XX	41-76-XX
Frequency Range, MHz	138-174	406-512	746-960
Frequency Split, MHz	36	24	24
Bandwidth	2.5% Cent. Freq.	1% Cent. Freq.	2.5% Cent. Freq.
Continuous Power Input, Watts	150	250	150
Connectors	N Female		
Output Load Size	5/25/60/100/150	5/25/60/100/150	5/25/60/100/150
Reverse Isolation, Db	30	30	30
Typical Insertion Loss, dB	0.45	0.45	0.25
VSWR	1.22:1	1.22:1	1.22:1
Temperature Range, °C	-40 to +60	-40 to +60	-40 to +60
Mechanical Specifications	41-13-XX	41-40-XX	41-76-XX
Dimensions, in (H x W x D)	3.94 x 3.75 x 1.78	4.19 x 3.99 x 1.78	5.63 x 3.15 x 1.84
Weight, lbs	1.40	1.41	1.32
Mounting	Cavity / Plate / Cabinet / Rack Mount Are All Available		

* See appendix for ordering information (Page 243)