
## **XPANDABLE TRANSMIT COMBINER**

## 108-136MHz

## XTC-Xpandable Transmit Combiner Series—10" Cavity

Our eXpandable Transmit combiners can combine from 1 to 21 channels. The XTC series of filters incorporates expandability, close frequency spacing and some of the lowest insertion losses in the industry. Using a 6.625" cavity, the XTC can easily support 75 kHz Tx-Tx spacing or 50 kHz spacing while using 10" cavities. Each cavity is constructed using a gold alodine finish, silver plated loops, silver plated connectors and internal tuning plunger. Additionally, cavities are temperature compensated for operation between -40°C to +60°C. Every cavity is equipped with both coarse and fine tuning rods for quick and easy field or lab re-tuning.

- Flexible and expandable design, From 1-21 channel capacity
- Expandable: 1 or more additional channels at a time, Re-configurable equipment
- 108-136 MHz, 28 MHz of operating bandwidth
- Temperature compensation, Ensures frequency stability
- High attenuation, Minimizes desense and interference
- Ultra-low insertion losses, Low coupling and bridging losses
- Continuous high-power handling capability, 150 watts 24/7

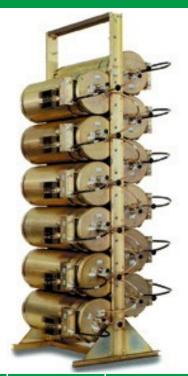

Electrical Specifications	XTC-11-02	XTC-11-04	XTC-11-0	6 XTC-11-08	XTC-11-0-10	XTC-11-0-12
Frequency Range, MHz	108-136	108-136	108-136	108-136	108-136	108-136
Bandwidth, MHz	28	28	28	28	28	28
Number of Channels	2	4	6	8	10	12
Cavity Diameter, in	10	10	10	10	10	10
Min. Channel Sep., KHz	50	50	50	50	50	50
Isolation Min., Tx-Tx, dB	70	70	70	70	70	70
Isolation Min., Ant-Tx, dB	60	60	60	60	60	60
Max. Insertion Loss Per Chan., dB	4.1	4.8	5.1	5.4	5.6	5.7
Continuous Power Input, Watts	150	150	150	150	150	150
Connectors	N Female	N Female	N Female	N Female	N Female	N Female
VSWR	1.22:1	1.22:1	1.22:1	1.22:1	1.22:1	1.22:1
Mechanical Specifications	XTC-11-02	XTC-11-04	XTC-11-	06 XTC-11-08	XTC-11-0-10	XTC-11-0-12
Height, in (H x W X D) (mm)	86.5 x 24 x 40.25 (2197 x 610 x 1022)					
Mounts in 19" Standard Rack	Yes	Yes	Yes	Yes	Yes	Yes
Weight	DEPENDS ON SET-UP AND RACK DESIGN					
Order Information	Single Chan	nel 2 - Ch	nannel	3 - Channel	5 - Channel	8 - Channel
4" Cavity	XTC-10-41	XTC-10-41 XTC-:		XTC-10-43	XTC-10-45	XTC-10-48
6.625" Cavity	XTC-10-71	XTC-	10-72	XTC-10-73	XTC-10-75	XTC-10-78
10" Cavity	XTC-10-01 XT		10-02	XTC-10-03	XTC-10-05	XTC-10-08



Tel: US 1.877.825.2007 / CAN 1.800.603.1454 Fax: 1.800.554.1033 / Email: sales@comprodcom.com