


## 2-INCH CAVITY DUPLEXERS

### 66-FF-2P Series 2" Cavity Duplexers

Comprod Inc. 2" base station duplexers are ideal for compact high isolation installations. These filters are designed for the combination of two frequencies that require extra isolation or they can be used as efficient pre-selectors. Available in either 4 or 6 cavity configurations if higher levels of isolation are required. Selectivity can be determined by the field adjustable capacitors. Each cavity is temperature compensated for operation between -40°C to +60 °C. Each cavity has a gold alodine finish, silver plated loops, and silver plated tuning rods.

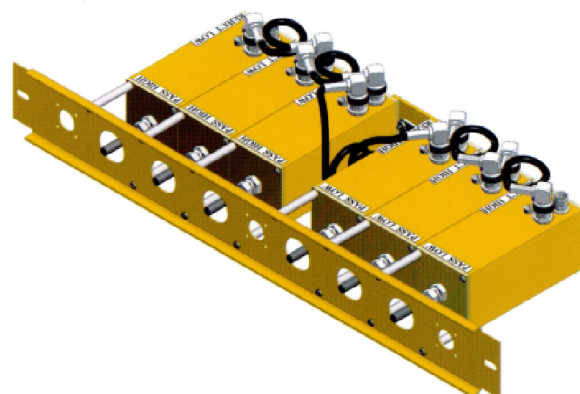

- **Temperature Compensation**

- Ensures Frequency Stability

- **High Attenuation**

- Minimizes desense and interference from adjacent systems

Electrical Specifications	66-13-24	66-14-24	66-13-26	66-14-26
Frequency Range, MHz	132-150	144-174	132-150	144-174
Frequency Spacing Min.	4.5	4.5	3.0	3.0
Cavity Number	4	4	6	6
Cavity Diameter, in	2.0	2.0	2.0	2.0
Continuous Power Inputs, Watts	100	100	100	100
Connectors (Equipment/Antenna)	BNC/N	BNC/N	BNC/N	BNC/N
Insertion Loss	1.5	1.5	1.5	1.5
Chanel Isolation, dB	70	70	80/90	80/90
VSWR	1.3:1		1.3:1	
Temperature °C	-40 to +60	-40 to +60	-40 to +60	-40 to +60

Mechanical Specifications	66-13-24	66-14-24	66-13-26	66-14-26
Maximum length, in (H x W X D)	5.25 x 19 x 7.25		5.25 x 19 x 7.25	
Mounting	19" Rack Mount			

*These duplexers are available in other frequencies and configurations. Please call our technical support for additional models..*