


#9 DRILL (2) PACES FOR SELF TAPPING SCREWS. 9/32" DRILL WHEN USING 1/4-20 BOLTS

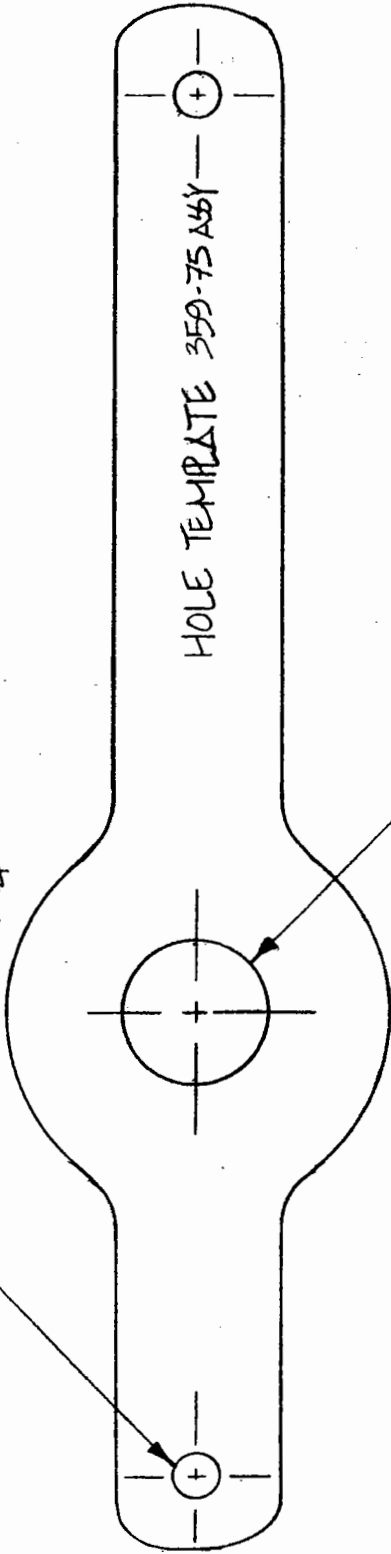

HOLE TEMPLATE 359-75 ASBY

3/4" DIA HOLE REQUIRED FOR CONNECTOR

DIMENSIONAL TOLERANCES <table border="1"> <tr> <th>BASIC</th> <th>FRACTIONAL</th> <th>DECIMAL</th> </tr> <tr> <td>0" - 1"</td> <td>± .010</td> <td>± .003</td> </tr> <tr> <td>1" - 6"</td> <td>± 1/64</td> <td>± .005</td> </tr> <tr> <td>6" - 24"</td> <td>± 1/32</td> <td>± .008</td> </tr> </table>		BASIC	FRACTIONAL	DECIMAL	0" - 1"	± .010	± .003	1" - 6"	± 1/64	± .005	6" - 24"	± 1/32	± .008	TITLE <b>HOLE TEMPLATE FOR 359-75</b>		DRAWING No. <b>C-0546</b>	
		BASIC	FRACTIONAL	DECIMAL													
0" - 1"	± .010	± .003															
1" - 6"	± 1/64	± .005															
6" - 24"	± 1/32	± .008															
		Drawn by: <b>M.M.</b>		Date: <b>01-05-98</b>													
		Approved by: <b>FA</b>															
<b>COMPROD COMMUNICATION LTEE / LTD.</b>																	

REVISION