

### 945-70


This antenna is a broadband antenna that can be used for public safety as well as cellular. It makes an ideal solution for a donor antenna for a DAS system. Comprod In-building system antennas are designed to provide excellent coverage solutions in order for external Public Safety Radio Frequencies to propagate within buildings, tunnels or public use environments.

#### Features:


- Very high durability
- Very wide bandwidth



Specifications	945-70
Frequency Band:	680-2700 MHz.
Gain:	8-9 dBd
Impedance:	50 Ohm
Intermodulation IM3 2 carrier, 20 W each:	-150 dBc
Power:	300 watts at lowest frequency, 150 Watts at highest frequency
Front to back Ratio:	25 dB
Half power Horizontal Beamwidth (V Pol):	60 (high frequency)-65 (low frequency) degrees
Half power Vertical Beamwidth (V Pol):	45 (high frequency)-50 (low frequency) degrees
Connector:	DIN 7/16. N type also available (PIM not guaranteed with N type connector)
Max wind Velocity:	240 Km/h (150)mph
Dimensions:	30" x 13" x 3"

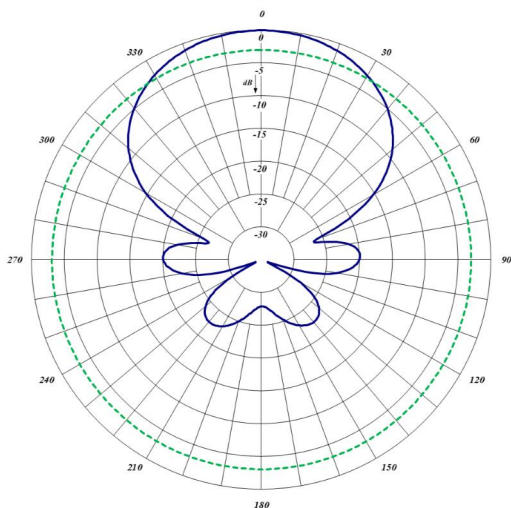

Horizontal pattern 680-1690 Vertical Polarization

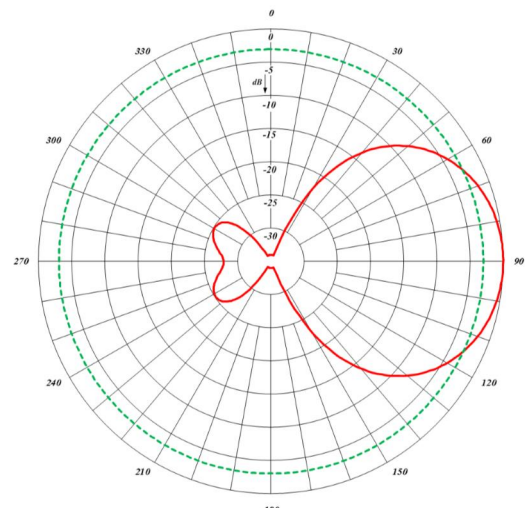

Vertical pattern 680-1690 Vertical Polarization