


HTC-40-OX

Our Hybrid Transmit Combiners are designed for compact, close frequency installations. Our HTCs are perfect for very closely spaced frequency transmitters. These devices are ideal for use when our X-Pass technology does not provide adequate performance and isolation for very close TX-TX spacing. Hybrid Combiners are also ideal for intermodulation panels, providing extra protection with their second harmonic filters, or when physical space is at a premium, and for providing extra isolation between two very close transmitters.

- High Isolation
 - Minimizes intermodulation products
- Low loss
 - Maximizes system performance
- Continuous Power
 - Physical size and materials used maximize the performance across the operating band

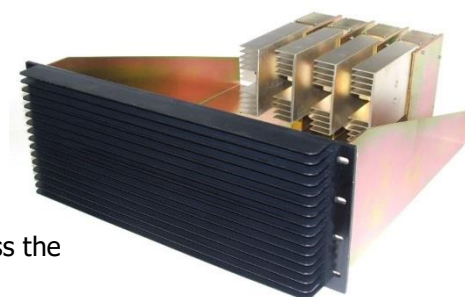

Electrical Specifications	HTC-40-04HS	HTC-40-02HS	HTC-40-04HD	HTC-40-02HD
Frequency Range, MHz	406-512	406-512	406-512	406-512
Frequency Split, MHz	30	30	24	24
Bandwidth	2.5% Cent. Freq.	2.5% Cent. Freq.	1% Cent. Freq.	1% Cent. Freq.
Channels	4	2	4	2
Continuous Power Input, Watts*	100	100	100	100
Connectors	N Female			
Isolator	Single	Single	Dual	Dual
Isolation TX/TX, dB	65	65	100	100
Isolation Ant/TX	35+	35+	70+	70+
Typical Insertion Loss, dB	6.8	3.5	7.0	3.7
VSWR	1.1:1 / 1.3:1	1.1:1 / 1.3:1	1.1:1 / 1.3:1	1.1:1 / 1.3:1
Temperature Range, °C	-40 to +60	-40 to +60	-40 to +60	-40 to +60
Mechanical Specifications	HTC-40-04HS	HTC-40-02HS	HTC-40-04HD	HTC-40-02HD
Dimensions, in (H x W x D)	6.5 x 19 x 18	6.5 x 19 x 18	6.5 x 19 x 18	6.5 x 19 x 18
Weight, lbs	40.5	29.5	44.6	31.5
Mounting	19" Rack Mount			

*Low power input (60 Watts) models are also available. Please contact our Technical Support team.



sales@comprodcom.com | comprodcom.com

☎ US 1.877.825.2007 / CAN 1.800.603.1454

FAX 1.800.554.1033