


TITLE		
MOUNTING INSTRUCTIONS FOR BUMP-400900 DUAL ANTENNA (400-900 MHz)		
DRAWING Nr.		
<b>C-44329</b>		
<b>1/2</b>		
Drawn by	Approved by	Date
G.M	F.A	FEB-03-2022




## DUAL ANTENNA INSTALLATION & CABLE ROUTING

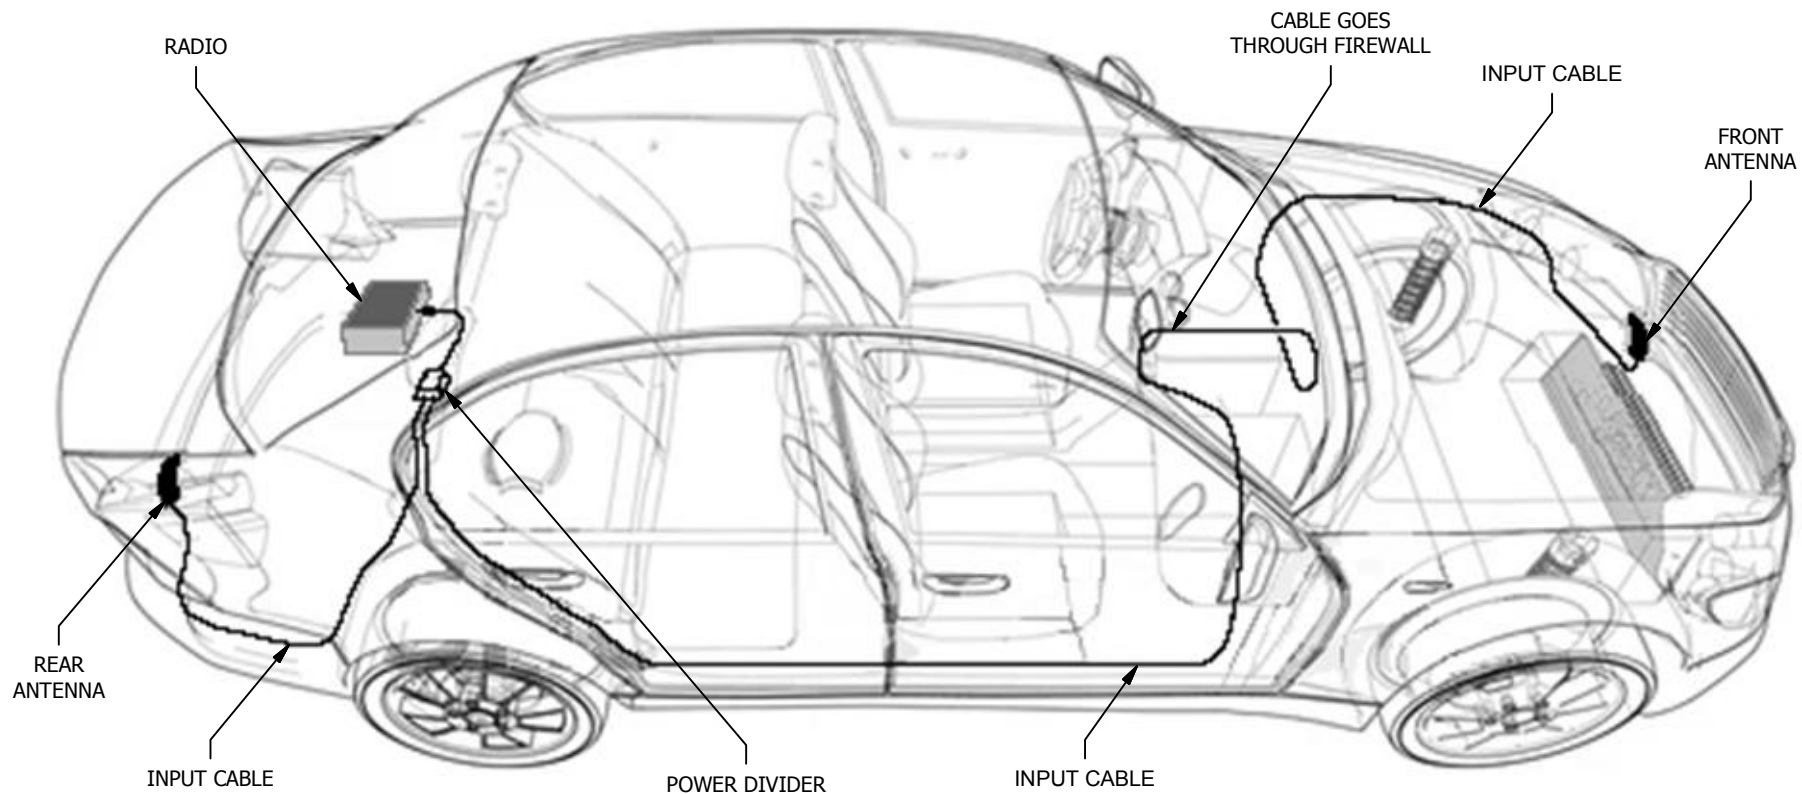

### STEPS:

- 1 - When location has been well determined, fasten the power divider box with 2 self-tapping screws, to the vehicle frame.
- 2 - Clean internal bumper surface with degreaser solvent before fixing (sticking as vertically as possible) the antenna.
- 3 - Route the input cable through the engine compartment (secured with tie-wraps), through firewall and into the vehicle to the radio, keeping them away from any moving parts.
- 4 - After routing cables, attach loose connectors, supplied with the antennas.

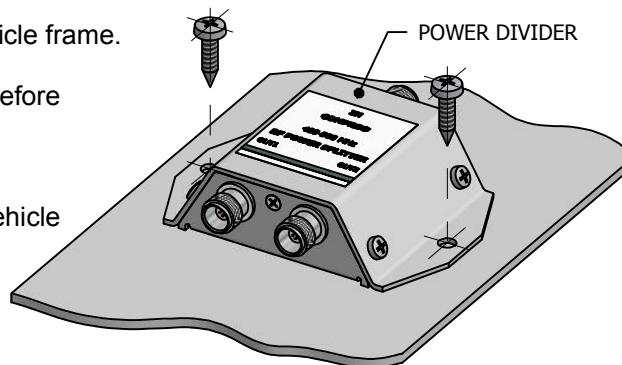

### NOTE:

- Do not connect cables to the radio until the installation procedure is complete!

TITLE MOUNTING INSTRUCTIONS  
FOR BUMP-400900  
DUAL ANTENNA (400-900 MHz)

DRAWING NO. **C-44329**  
**2/2**

Drawn by  
G.M

Approved by  
F.A

Date  
FEB-03-2022

