


**945-70-NF**


This antenna is a broadband antenna that can be used for public safety as well as in cellular bands. It makes an ideal solution for a donor antenna for a DAS system. Our In-building system antennas are designed to provide excellent coverage solutions in order for external Public Safety Radio Frequencies to propagate within buildings, tunnels or public use environments.

## Features:


- Rugged design to withstand the most extreme environmental conditions.
- Extra wide bandwidth for use in multiple bands.

Specifications	945-70-NF
Frequency Band:	580-3000 MHz
Gain:	8-9 dBd
Impedance:	50 Ohm
Power:	300 Watts at lowest frequency, 150 Watts at highest frequency
Front to back Ratio:	25 dB
Half power Horizontal Beamwidth (V Pol):	60 (high frequency) degrees -65 (low frequency) degrees
Half power Vertical Beamwidth (V Pol):	45 (high frequency) degrees -50 (low frequency) degrees
Connector:	N-Female, DIN 7/16 and Mini-DIN connector also available under request
Max wind Velocity:	240 Km/h (150 mph)
Dimensions:	30" x 13" x 3"
Weight, lbs (kg)	6 (2.72)

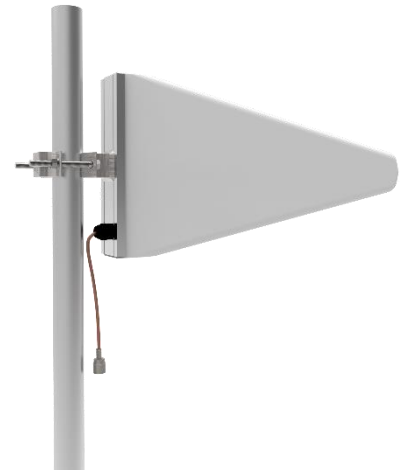


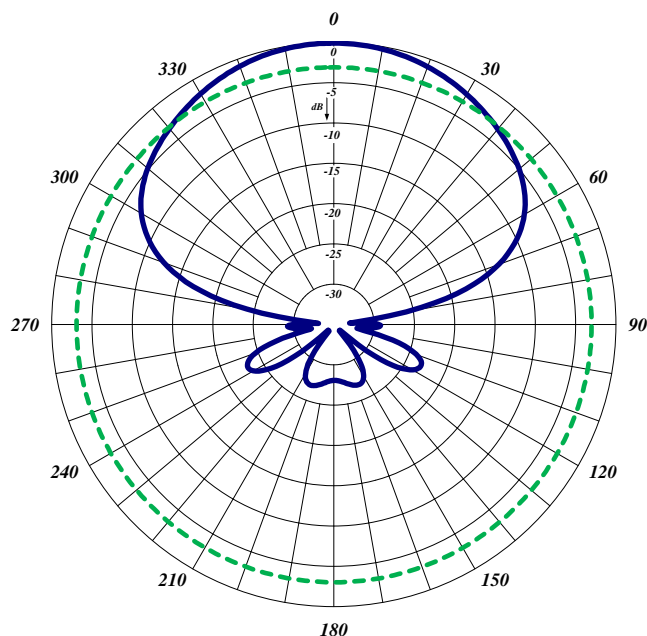

Horizontal Pattern 580-1690 Vertical Polarization

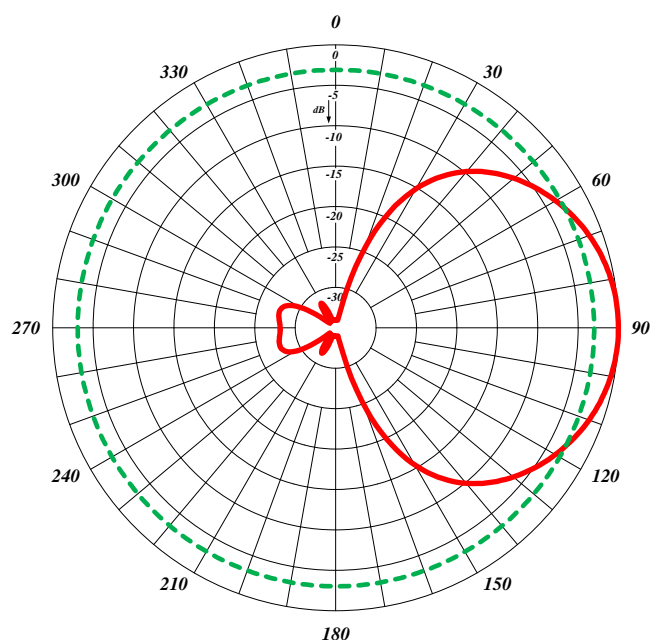

Vertical Pattern 580-1690 Vertical Polarization

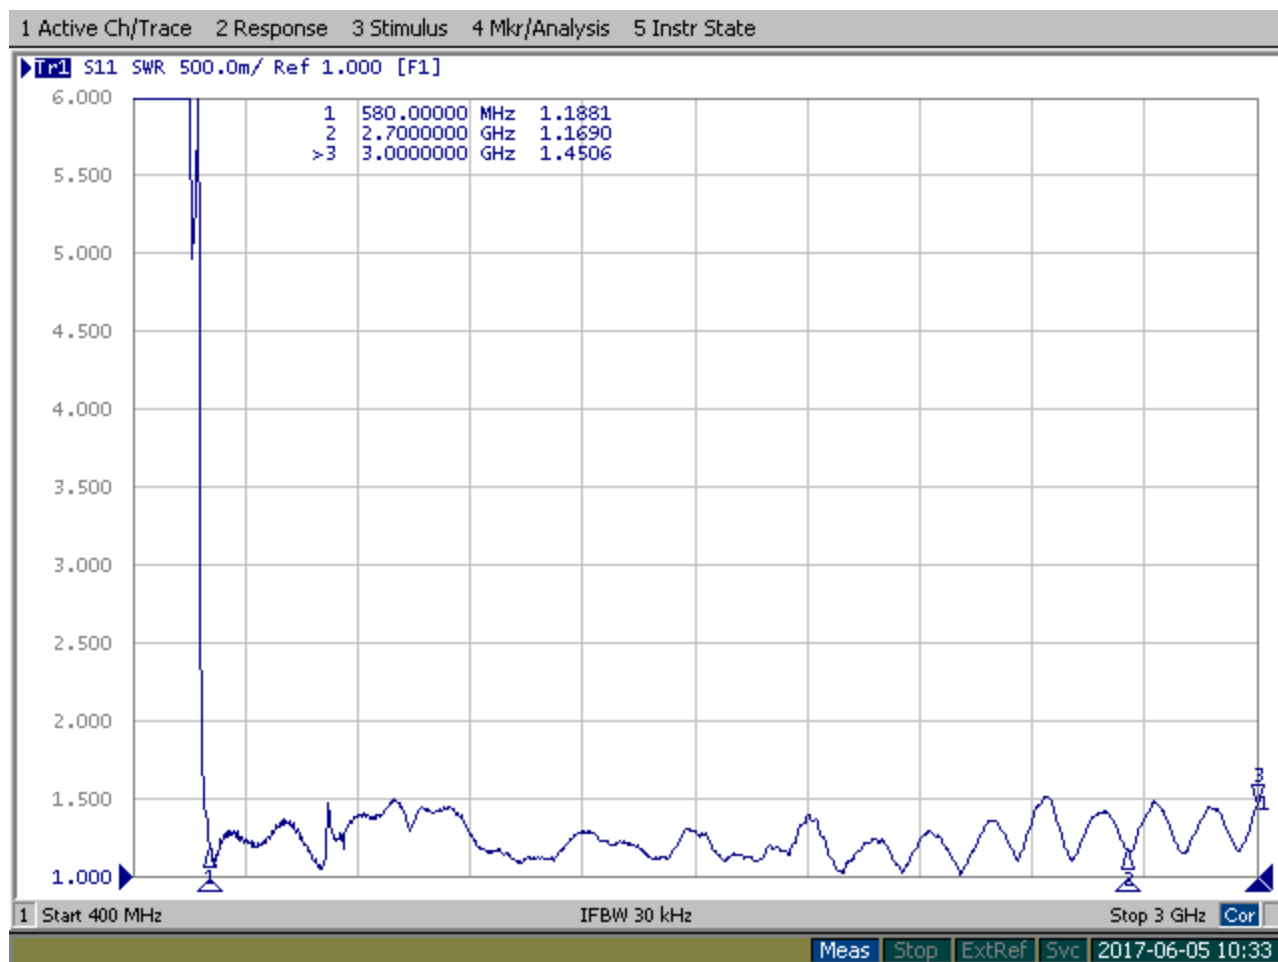**COMPROD**[www.comprod.com](http://www.comprod.com)

Tel: US 1.877.825.2007 / CAN 1.800.603.1454

Email: [sales@comprod.com](mailto:sales@comprod.com)

Fax: 1.800.554.1033