

BASE STATION ANTENNAS

924-70-2.5-DM*2

The Null Fill is optional, the Down tilt degrees available from 1 to 10 in one degree increment.

Electrical Specifications	924-70-2.5-DM*2
Frequency Range	400-420 MHz
Gain	2.5 dBd
VSWR (Return Loss)	<1.5:1 (14dB)
Passive IM 3 rd Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	300 W
Vertical Beamwidth	28°
Horizontal Beamwidth	Omni +/-0.25 dB
Input	7/6 DIN Male

Radome Material	Fiberglass Pultrusion
-----------------	-----------------------

Mechanical Specifications	924-70-2.5-DM*2
Configuration	Collinear Dipole Array
Length	61"
Radome Diameter	2.5"
Weight	10 lbs
Shipping Weight	15 lbs
Shipping Dimensions	L 63" W 4" H 4"

Mounting Area	12.0" x 3.0" diam. aluminum
---------------	-----------------------------

Suggested Clamps (not included)	107-85
---------------------------------	--------

Environmental Specifications	924-70-2.5-DM*2
Operating Temperature	-58° to +140°F (-50°C to 60°C)
IP Rating	66
Projected Area	0.85 ft2 (no ice) 1.72 ft2 (with ice)
Lateral Thrust @ 100mph	34 lbs.
Wind Gust Rating	150 mph


IP Rating	66
-----------	----

Projected Area	0.85 ft2 (no ice) 1.72 ft2 (with ice)
----------------	--

Lateral Thrust @ 100mph	34 lbs.
-------------------------	---------

Wind Gust Rating	150 mph
------------------	---------



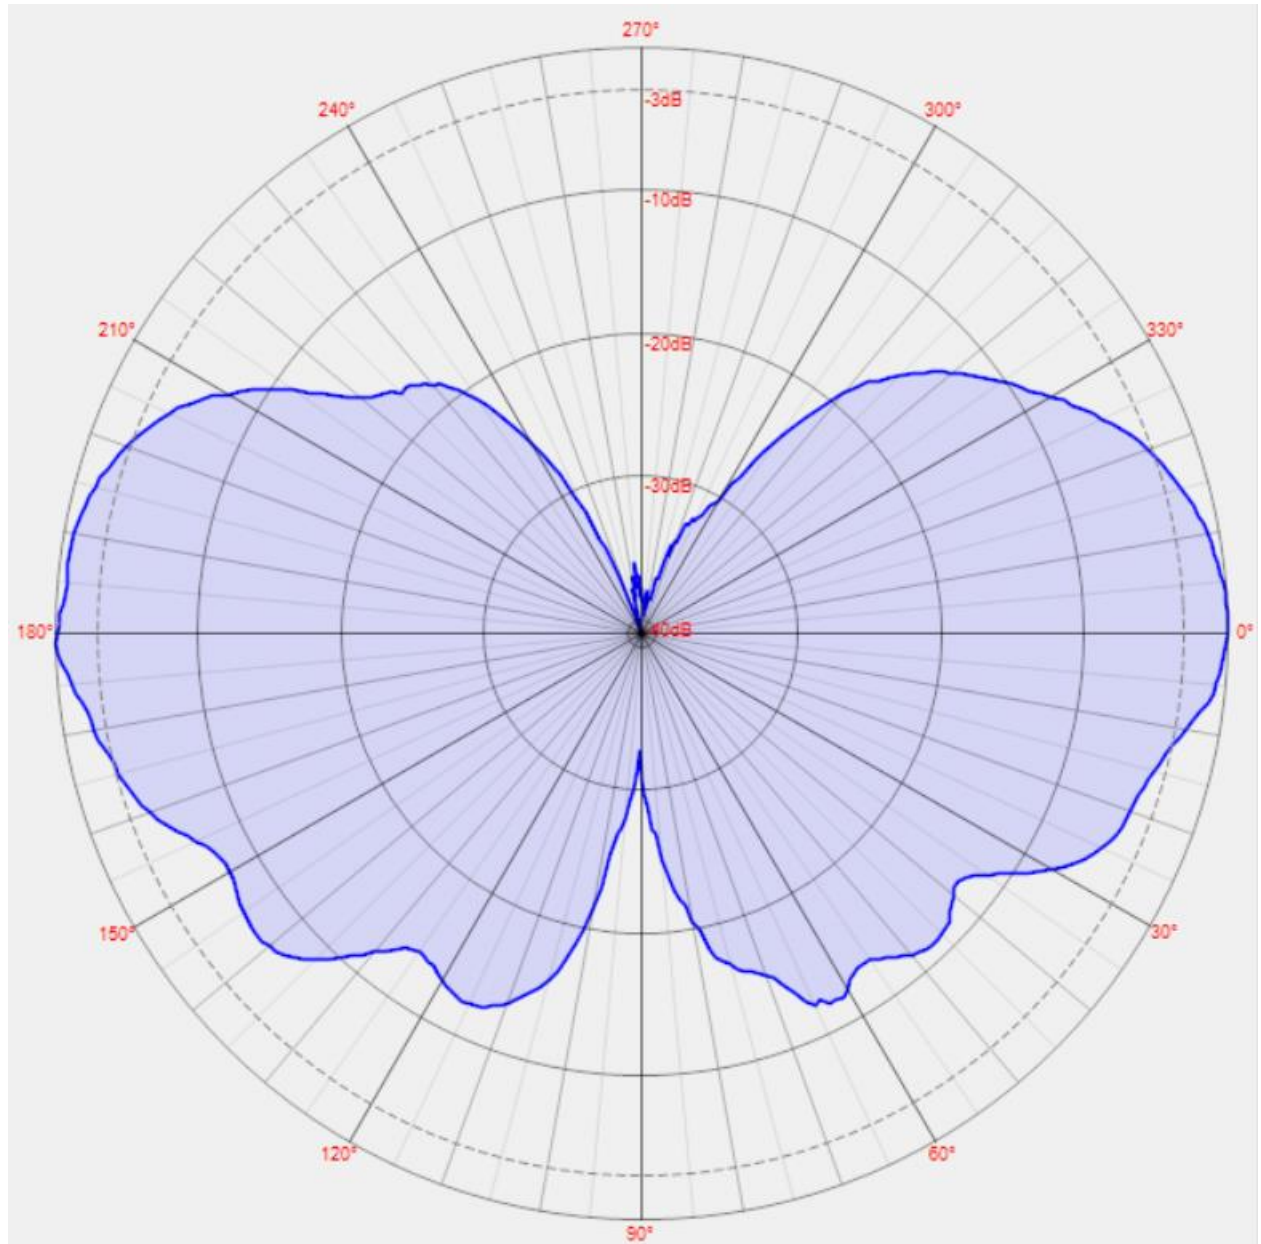

Standard Elevation Pattern