

BASE STATION ANTENNAS

927-70-5.5-DF

The Null Fill is optional, the Down tilt degrees available from 1 to 10 in one degree increment.


Electrical Specifications	927-70-5.5-DF
Frequency Range	740-870 MHz
Gain	5.5 dBd
VSWR (Return Loss)	<1.5:1 (14dB)
Passive IM 3 rd Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	500 W
Vertical Beamwidth	17°
Horizontal Beamwidth	Omni +/-0.25 dB
Input	7/16 DIN Female
Beam Tilt	0-10 degree options

Mechanical Specifications	927-70-5.5-DF
Configuration	Collinear Dipole
Length	62"
Radome Diameter	2.5"
Weight	12 lbs
Shipping Weight	18 lbs
Shipping Dimensions	L 64" W 4" H 4"
Mounting Area	12.0 x 3.0" diam. aluminum

Suggested Clamps (not included)	107-85
---------------------------------	--------

Environmental Specifications	927-70-5.5-DF
Operating Temperature	-40° to +140°F (-40°C to 60°C)
IP Rating	66
Projected Area	0.65 ft ² (no ice) 0.89 ft ² (with ice)
Lateral Thrust @ 100mph	26 lbs.
Wind Gust Rating	150 mph



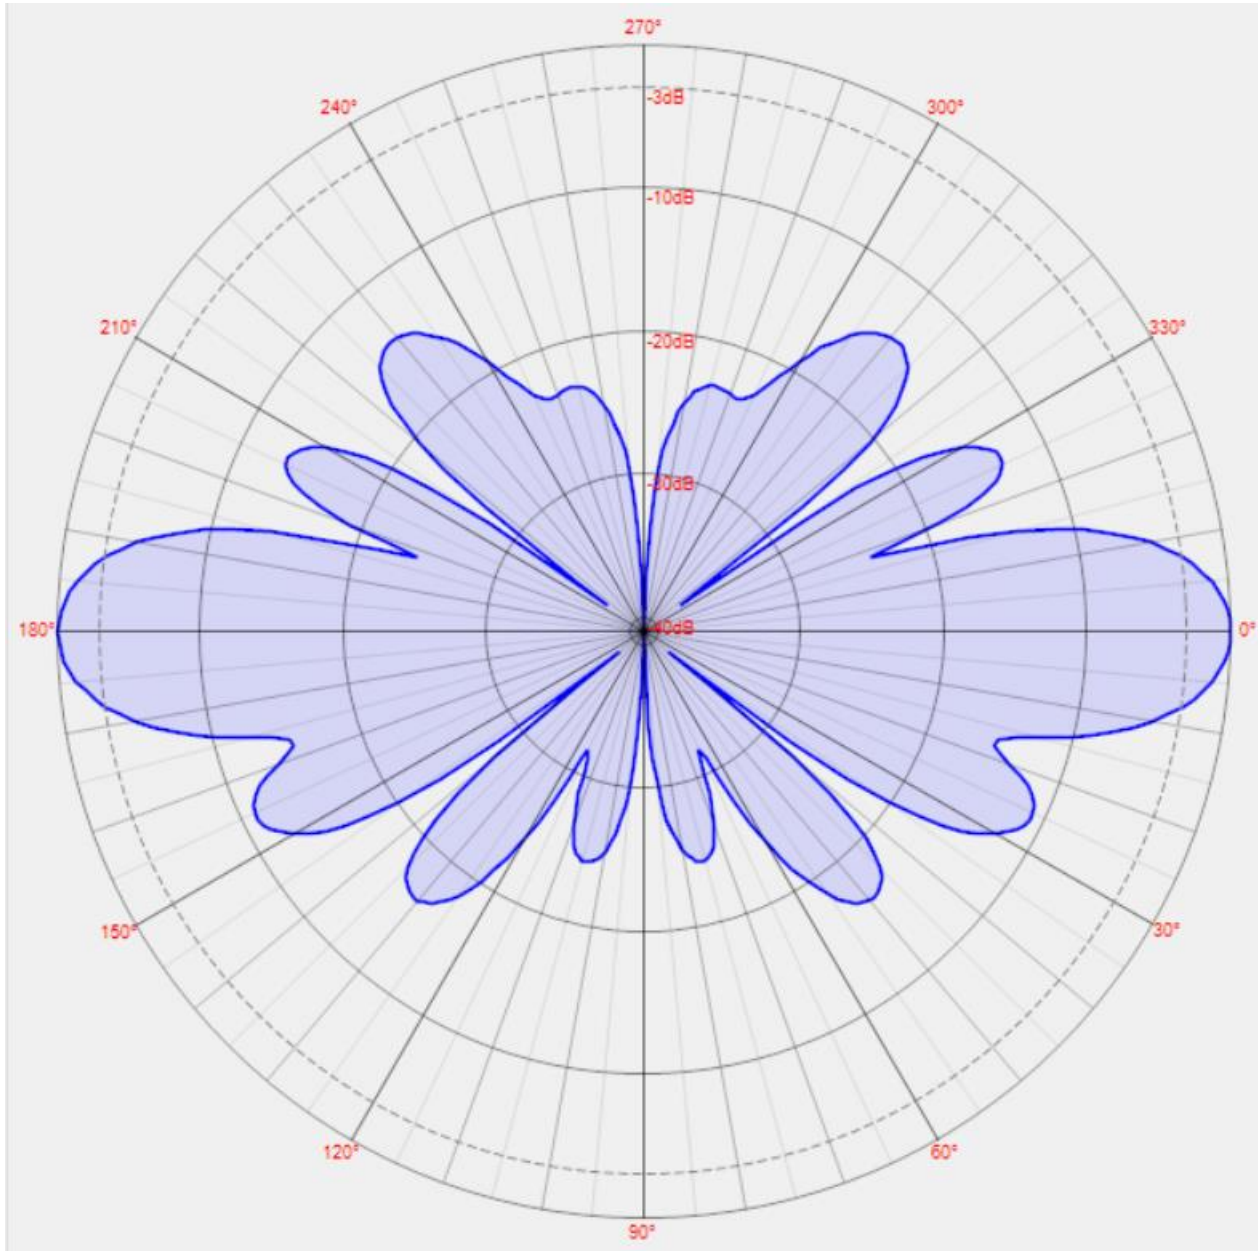

Standard Elevation Pattern