

**BASE STATION ANTENNAS**

**927-70-5.5-DM**

The Null Fill is optional, the Down tilt degrees available from 1 to 10 in one degree increment.


<b>Electrical Specifications</b>	<b>927-70-5.5-DM</b>
Frequency Range	740-870 MHz
Gain	5.5 dBd
VSWR (Return Loss)	<1.5:1 (14dB)
Passive IM 3 <sup>rd</sup> Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	500 W
Vertical Beamwidth	17°
Horizontal Beamwidth	Omni +/-0.25 dB
Input	7/16 DIN Male
Beam Tilt	0-10 degree options

<b>Mechanical Specifications</b>	<b>927-70-5.5-DM</b>
Configuration	Collinear Dipole
Length	62"
Radome Diameter	2.5"
Weight	12 lbs
Shipping Weight	18 lbs
Shipping Dimensions	L 64" W 4" H 4"
Mounting Area	12.0 x 3.0" diam. aluminum

Suggested Clamps (not included) 107-85

<b>Environmental Specifications</b>	<b>927-70-5.5-DM</b>
Operating Temperature	-40° to +140°F (-40°C to 60°C)
IP Rating	66
Projected Area	0.65 ft2 (no ice) 0.89 ft2 (with ice)
Lateral Thrust @ 100mph	26 lbs.
Wind Gust Rating	150 mph



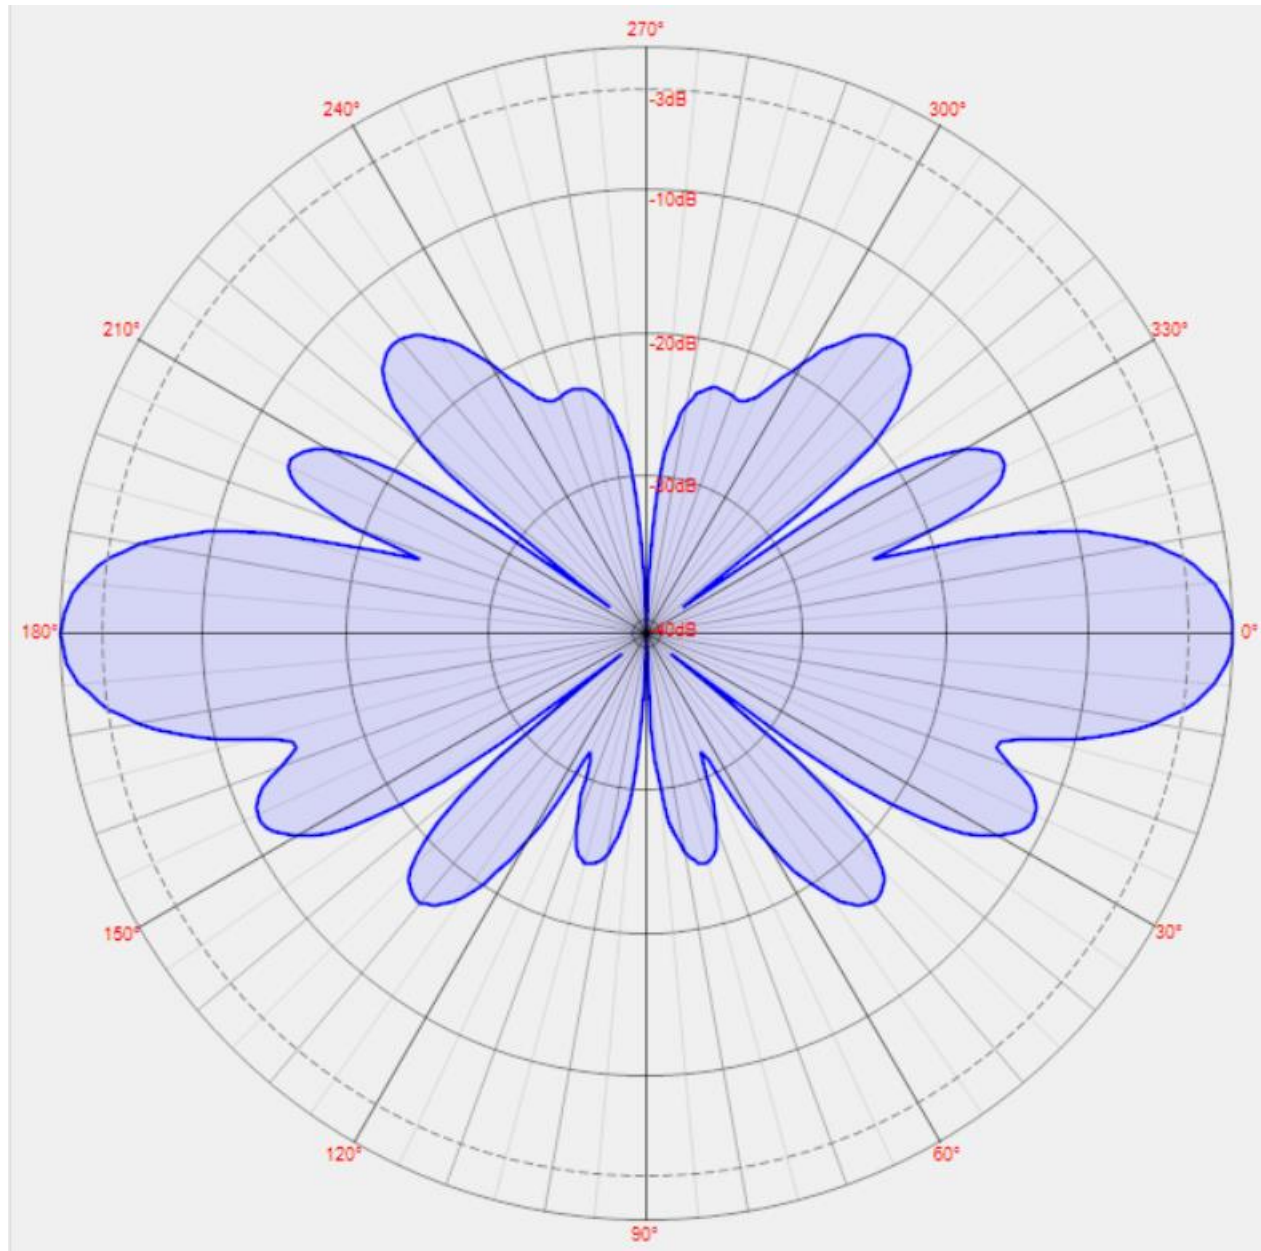

Standard Elevation Pattern



Tel: US 1.877.825.2007 / CAN 1.800.603.1454

Email: sales@comprodcom.com

Fax: 1.800.554.1033

[www.comprodcom.com](http://www.comprodcom.com)