


### HTC-80-OX

Our Hybrid Transmit Combiners are designed for compact, close frequency installations. Our HTCs are perfect for very closely spaced frequency transmitters. These devices are ideal for use when our X-Pass technology does not provide adequate performance and isolation for very close TX-TX spacing. Hybrid Combiners are also ideal for intermodulation panels, providing extra protection with their second harmonic filters, or when physical space is at a premium, and for providing extra isolation between two very close transmitters.

- High Isolation
  - Minimizes intermodulation products
- Low loss
  - Maximizes system performance
- Continuous Power
  - Physical size and materials used maximize the performance across the operating band

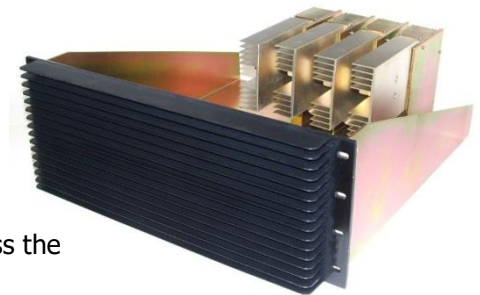

Electrical Specifications	HTC-80-04HS	HTC-80-02HS	HTC-80-04HD	HTC-80-02HD
Frequency Range, MHz	806-960	806-960	806-960	806-960
Frequency Split, MHz	30	30	24	24
Bandwidth	2.5% Cent. Freq.	2.5% Cent. Freq.	1% Cent. Freq.	1% Cent. Freq.
Channels	4	2	4	2
Continuous Power Input, Watts*	100	100	100	100
Connectors	N Female			
Isolator	Single	Single	Dual	Dual
Isolation TX/TX, dB	65	65	100	100
Isolation Ant/TX	35+	35+	70+	70+
Typical Insertion Loss, dB	6.8	3.5	7.0	3.7
VSWR	1.1:1 / 1.3:1	1.1:1 / 1.3:1	1.1:1 / 1.3:1	1.1:1 / 1.3:1
Temperature Range, °C	-40 to +60	-40 to +60	-40 to +60	-40 to +60
Mechanical Specifications	HTC-80-04HS	HTC-80-02HS	HTC-80-04HD	HTC-80-02HD
Dimensions, in (H x W x D)	6.5 x 19 x 18	6.5 x 19 x 18	6.5 x 19 x 18	6.5 x 19 x 18
Weight, lbs	11.8	9.3-11	12.8	9.3-11
Mounting	19" Rack Mount			

\*Low power input (60 Watts) models are also available. Please contact our Technical Support team.