


### Ground Plane Antenna Series

The Ground Plane Antenna Series are available in VHF and UHF configurations. These omnidirectional antennas are either wide band unity or 2-3 dB gain antennas. They are constructed from high strength, corrosion resistant aluminum alloy and stainless steel. All our antennas can be completely customized to your particular applications.

- Each antenna has a rugged design to withstand the most extreme environmental conditions.
- Wide frequency band applications.
- The mounting hardware supplied will permit 0.75" to 2.38" O.D. pipe installation.
- DC ground for lightning protection.
- Ideal for mounting on buildings.



Electrical Specifications	265-70	266-70	267-70	268-70
Frequency Range, MHz (in splits)	118-174	118-174	118-137	406-470
Nominal Gain	Unity	2.0-3.0 dBd	Unity	2.0-3.0 dBd
Bandwidth 1.5:1 VSWR, MHz (% Ctr. Freq.)	6%	1%	15.6% (2:1)	1%
Tuning	Field Adj.	Field Adj.	Fixed	Field Adj.
Polarization	Vertical			
Vertical Beamwidth (Ver. Pol.)	80°	40°	71°	38°
Pattern	Omni			
Power Rating, Watts	300	250	250	100
Nominal Impedance, Ohms	50	50	50	50
Lightning Protection	DC Ground			
Standard Termination	Type N Male			
Mechanical Specifications	265-70	266-70	267-70	268-70
Max. Length, in (mm)	58 (1473)	108 (2743)	67 (1702)	46 (1168)
Width, in (mm)	55 (1397)	46 (1168)	26.5 (673)	20 (508)
Weight, lbs. (kg)	6.8 (3.3)	6.5 (3.0)	6.0 (2.7)	1.5 (0.7)
Rated Wind Velocity, No Ice, mph (km/h)	150 (241)	125 (201)	125 (201)	125 (201)
Rated Wind Velocity, 0.5" (13mm) Ice, mph	140(225)	85 (137)	110 (177)	85 (137)
Lateral Thrust @ 100 mph wind, lbs. (kg)	31.8 (14.4)	40 (18.1)	24 (10.7)	7.3 (3.3)
Bending Moment @top clamp: 100 mph, ft.*lb	41 (5.7)	94 (13)	28 (3.9)	12 (1.6)
Projected Area, ft <sup>2</sup> (m <sup>2</sup> )	1.2 (0.110)	1.57 (0.146)	0.88 (0.082)	0.27 (0.03)
Mounting Hardware Included	167-85	167-85	167-85	167-85

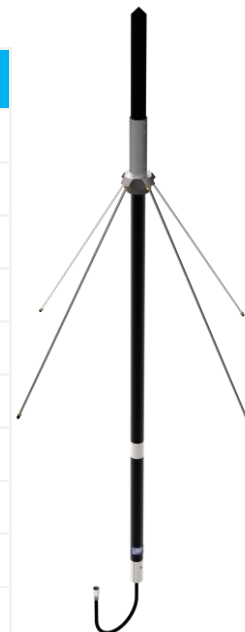

267-70

\* See appendix for ordering information of different frequency splits (page 230) \*

