

BASE STATION ANTENNAS

929-70-10.0-43M


The Null Fill is optional, the Down tilt degrees available from 1 to 10 in one degree increment.

Electrical Specifications	929-70-10.0-43M
Frequency Range	870-970 MHz
Gain	10 dBd
VSWR (Return Loss)	<1.5:1 (14dB)
Passive IM 3 rd Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	400 W
Vertical Beamwidth	6°
Horizontal Beamwidth	Omni +/-0.5 dB
Input	4.3-10 Male
Beam Tilt	0-10 degree options

Mechanical Specifications	929-70-10.0-43M
Configuration	Corporate Feed PC Dipole
Length	150"
Radome Diameter	2"
Weight	25 lbs
Shipping Weight	39 lbs
Shipping Dimensions	L 152" W 4" H 4"
Mounting Area	12.0" x 2.5" diam. aluminum
Suggested Clamps (not included)	112-85

Environmental Specifications	929-70-10.0-43M
Operating Temperature	-58° to +140°F (-50°C to 60°C)
IP Rating	66
Projected Area	2.08 ft ² (no ice) 3.13 ft ² (with ice)
Lateral Thrust @ 100mph	83 lbs-force
Wind Gust Rating	150 mph



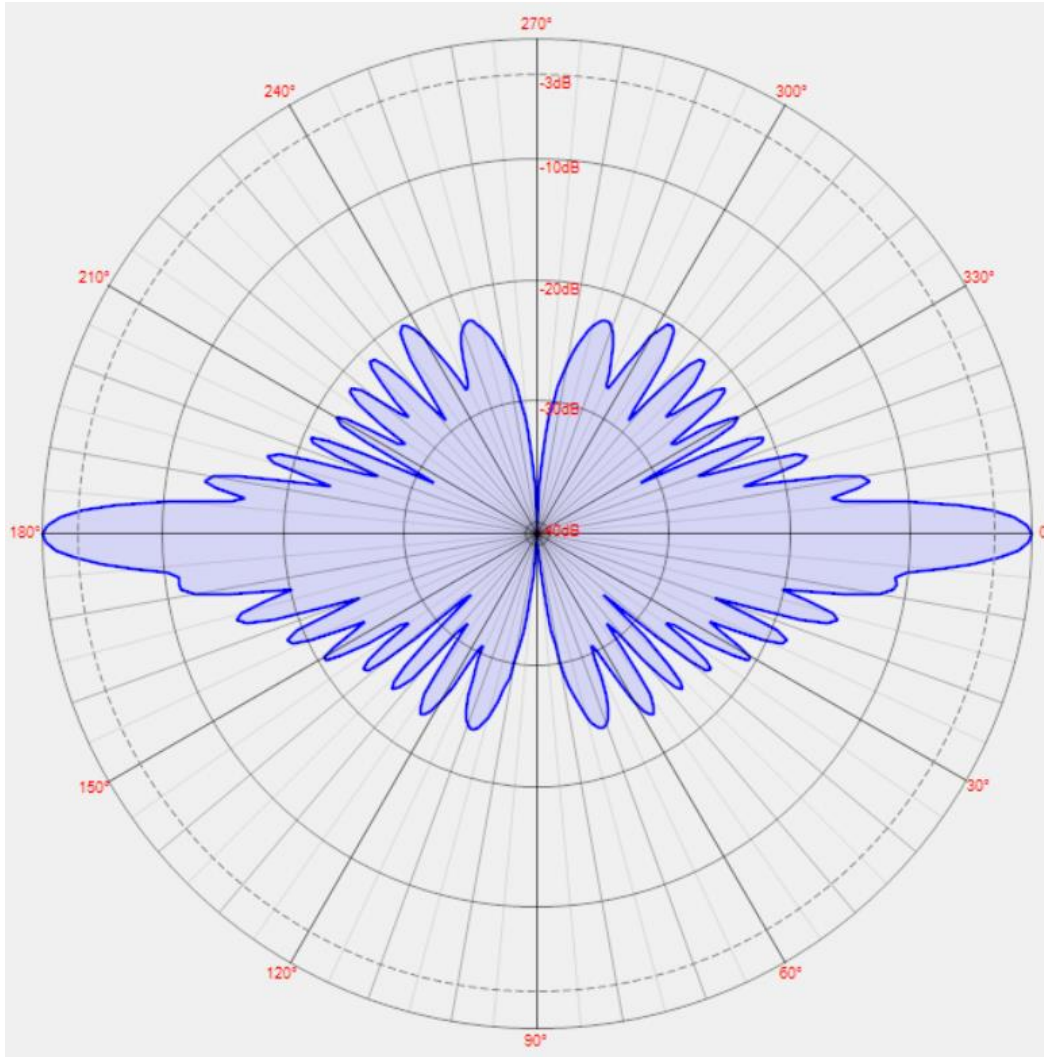

Standard Elevation Pattern